

TYGER ACCESS

TG-AS2T24016

Scan to Download the Latest Digital Version



BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES

Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126


- Driver/Left Tyger Access
- Passenger/Right Tyger Access
- Driver/Left Mounting Bracket [A]
- Driver/Left Center & Rear Mounting Brackets [B]
- Passenger/Right Mounting Bracket [C]

- Passenger/Right Center & Rear Mounting Brackets [D]
- 8-1.25mm x 30mm Hex Bolts
- 8-1.25mm x 25mm Combo Bolts
- 8mm x 24mm OD x 2mm Flat Washers
- 8mm Lock Washers

Parts List


Top View


ATTENTION: Refer to **1** and **2** labelling on the side of the tubes to determine Driver and Passenger TYGER Access

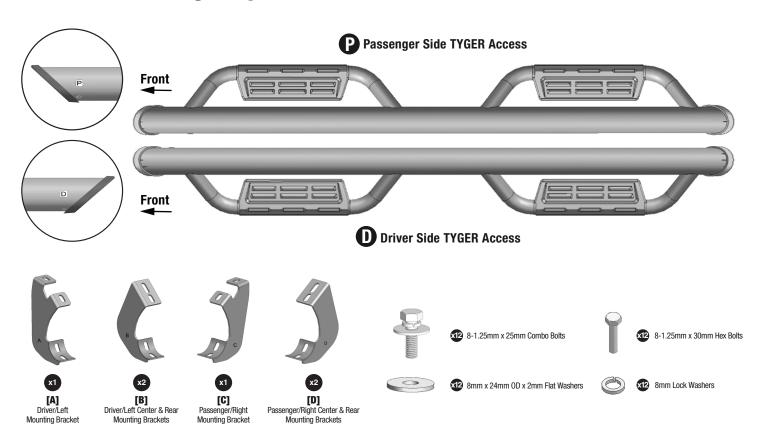



Reference the letters printed on the brackets to determine mounting locations

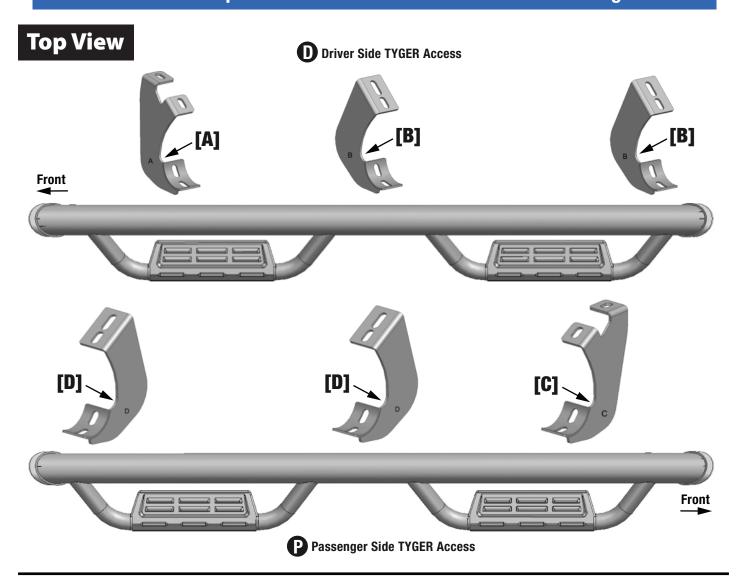

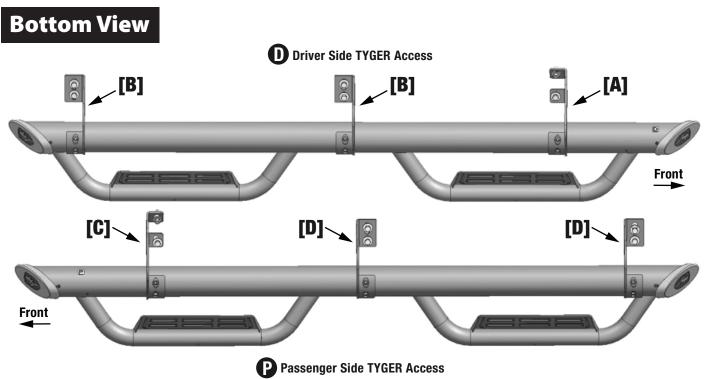




TOOLS REQUIRED













MOUNTING BRACKETS


Follow (Fig 1 - 10) to attach the brackets to the Passenger Side. **Ensure all hardware is hand tightened for this step.**






Passenger <u>Front</u> Mounting Areas

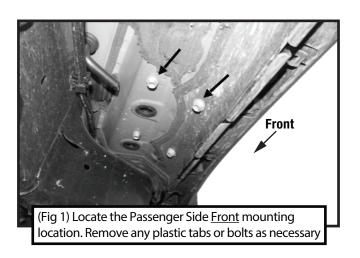


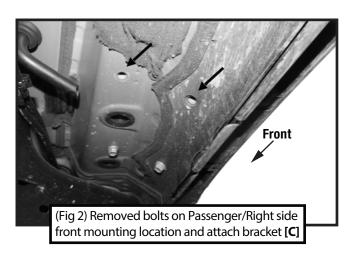


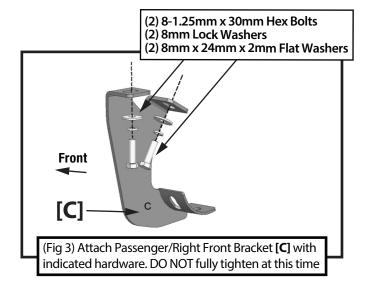




Passenger <u>Center</u> Mounting Areas

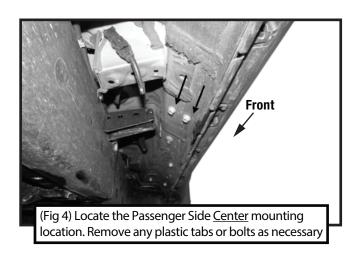


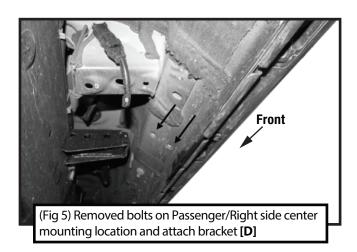


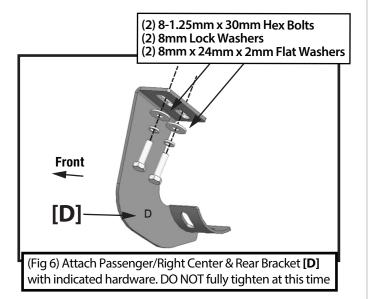




Passenger Rear Mounting Areas

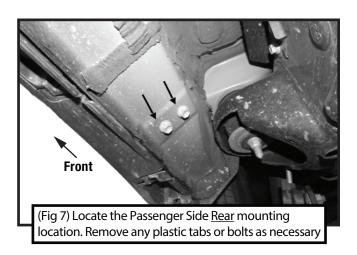


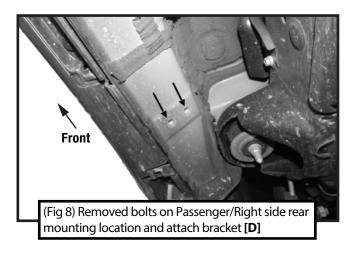

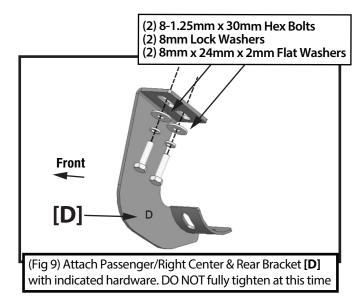

MOUNTING RUNNING BOARD

Follow (Fig 10) to install the TYGER Access Side Step on the Passenger/Right side. **Ensure all hardware is <u>hand tightened</u>** at this point.

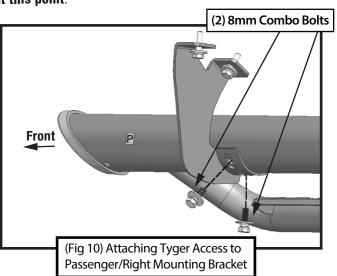




STEP3 DRIVER SIDE

Repeat **STEP 1-3** to install mounting brackets to the 3 mounting locations at Driver/Left side.

Use <u>Front Mounting Bracket [A] instead of [C];</u>
Use <u>Center & Rear Mounting Brackets [B] instead of [D].</u>



STEP 4

COMPLETION

Ensure TYGER Access is level and straightened, then <u>tighten all</u> <u>fasteners</u>. Installation is complete. Perform periodic inspections to the installation to make sure that all hardware is secure and tight.

