



FITMENT ISSUE?

NOTE: If necessary, place liners upside down to flatten out any irregularity from being folded in package.

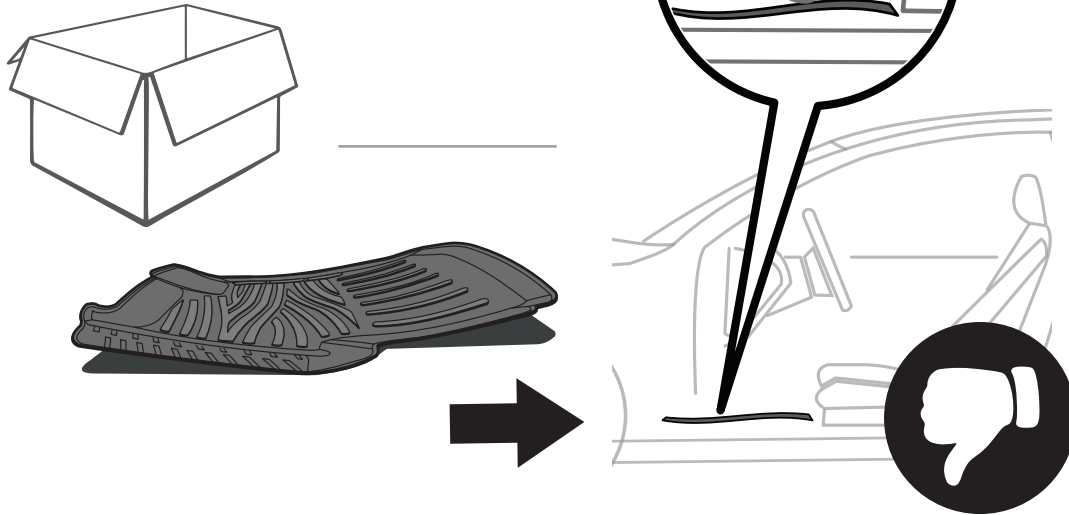

SOLUTION!

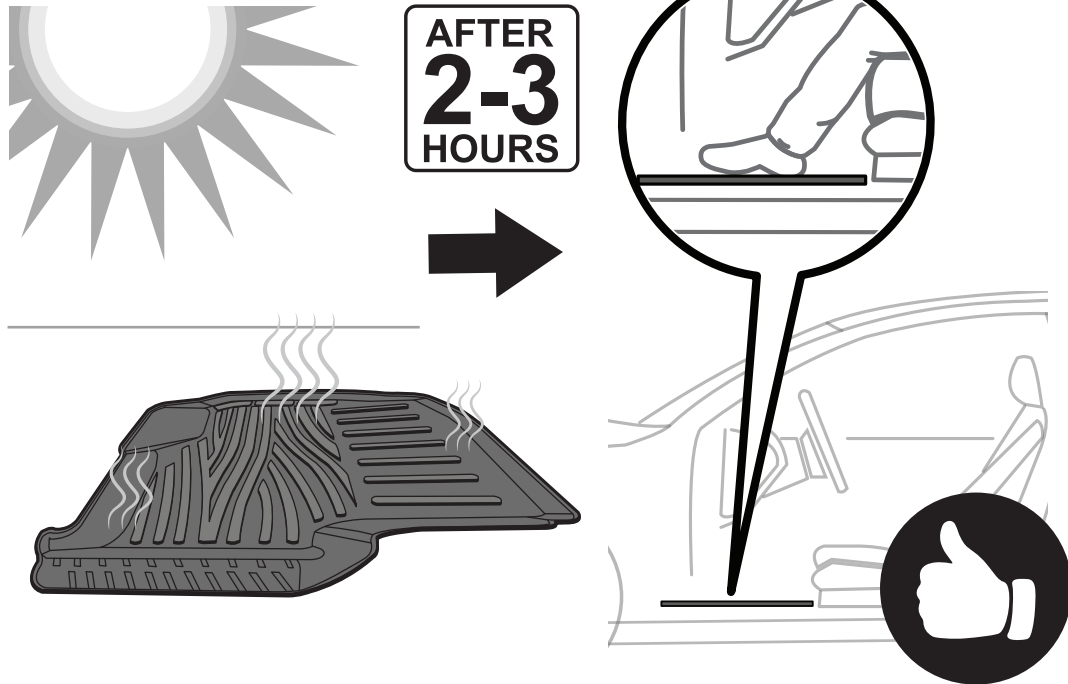

*In winter, heat gun or hair dryer may be used instead.



TYGER®

TG-FMF63038


WWW.TYGERAUTO.COM

 @tygerauto


 @tyger_auto

BEFORE INSTALLATION


Read instructions carefully, remove contents from box and verify all parts are present. Failure to identify damage before installation could lead to rejection of any claim.

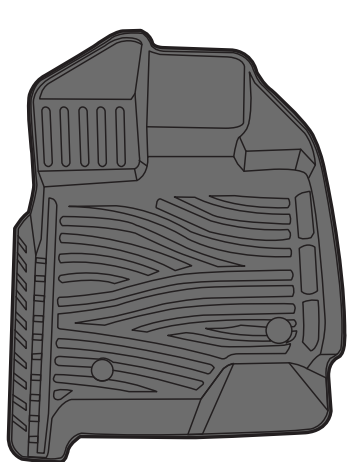

Front Driver Side

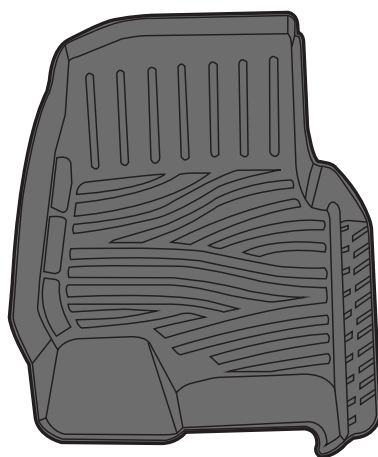

Front Passenger Side

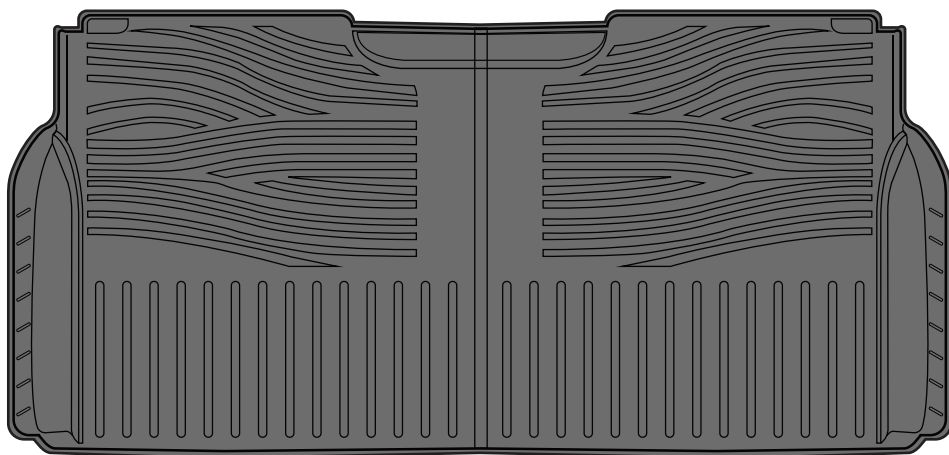

Rear Row

INSTALLATION

1. Clean vehicle interior carpet area thoroughly before installation.
2. Slide floor liners in place.
3. For driver side only, secure liner with factory retention hooks in the floor.
4. Ensure the accelerator, brake, and clutch pedals are able to move freely through their full range of motion without interference.

NOTES

- Must be installed directly on the floor and not placed over other floor mats or liners.
- Before operating the vehicle, check movements for the accelerator, brake, and clutch pedals to ensure no interference from the liner.
- Use mild detergent and water for cleaning; do not use abrasive chemical cleaners.

WARRANTY

TYGER provides hassle free warranty against any manufacturing defects in material or workmanship. Please visit tygerauto.com to learn more about our warranty policy.

HOW TO SUBMIT A CLAIM



➔ www.TygerAuto.com/contact

☎ 1-866-340-3038

*Please have your order information ready