



TYGER®

TYGER LanderX

TG-LX3T84768

Scan to Download the
Latest Digital Version



BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES



Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

- | | | |
|---|---|---------------------------------------|
| x1 Driver/Left TYGER LanderX D | x1 Driver/Left Rear Mounting Bracket [C] | x12 8-1.25mm x 25mm Combination Bolts |
| x1 Passenger/Right TYGER LanderX P | x1 Passenger/Right Front Mounting Bracket [D] | x12 8-1.25mm x 30mm Hex Bolts |
| x1 Driver/Left Front Mounting Bracket [A] | x1 Passenger/Right Center Mounting Bracket [E] | x12 8mm x 24mm x 2mm Flat Washers |
| x1 Driver/Left Center Mounting Bracket [B] | x1 Passenger/Right Rear Mounting Bracket [F] | x12 8mm Lock Washers |

Parts List

Top View


ATTENTION: Refer to **D** and **P** labelling on the side of the tubes to determine Driver and Passenger LanderX

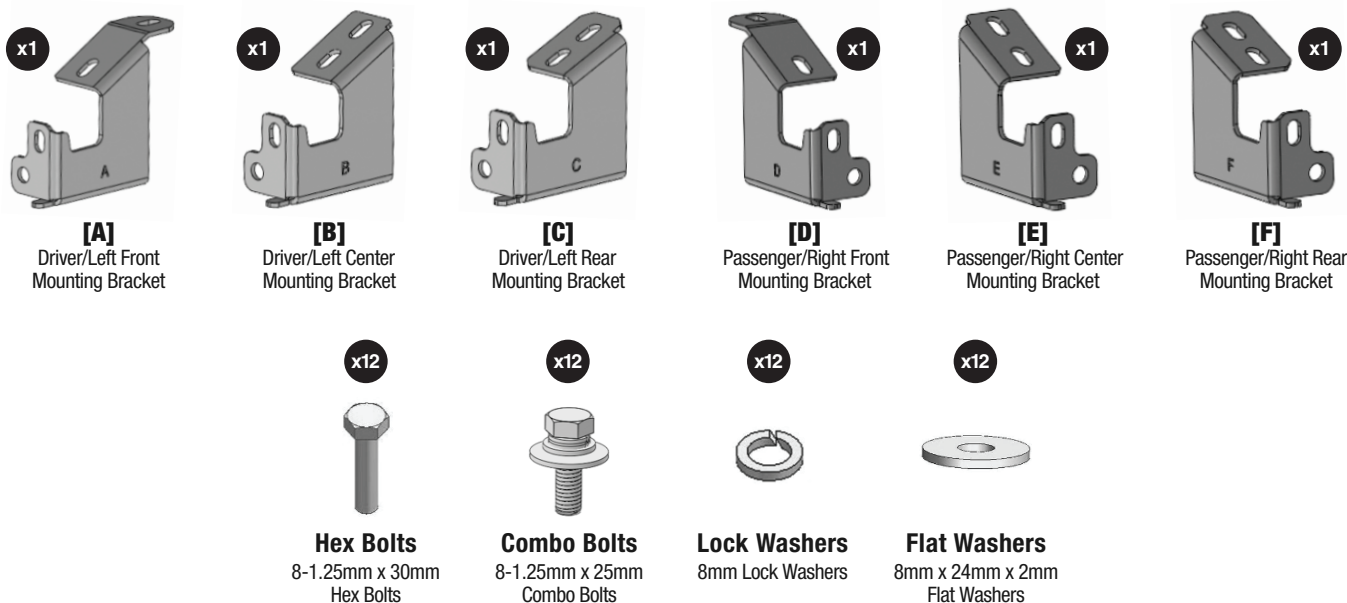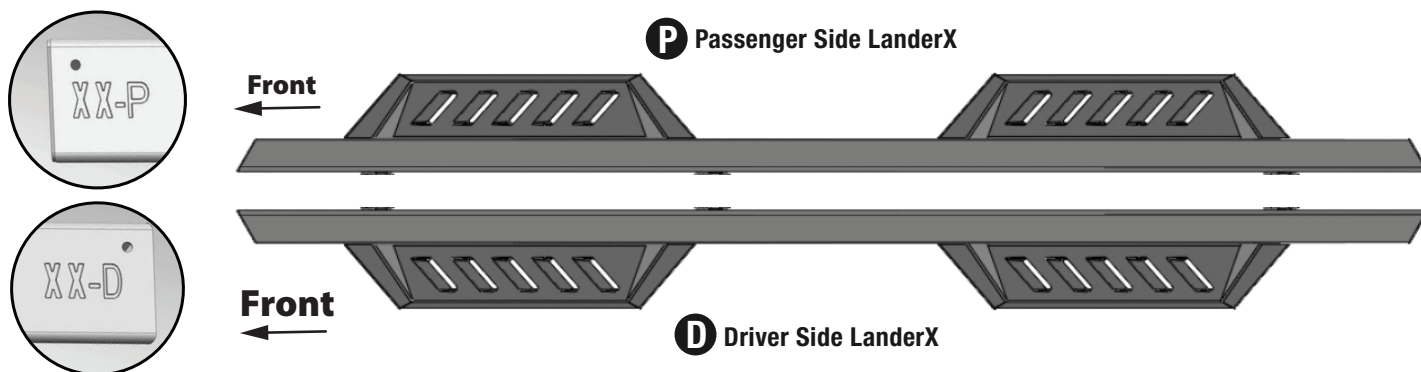

Reference the letters printed on the brackets to determine mounting locations


Top View

D Driver Side LanderX

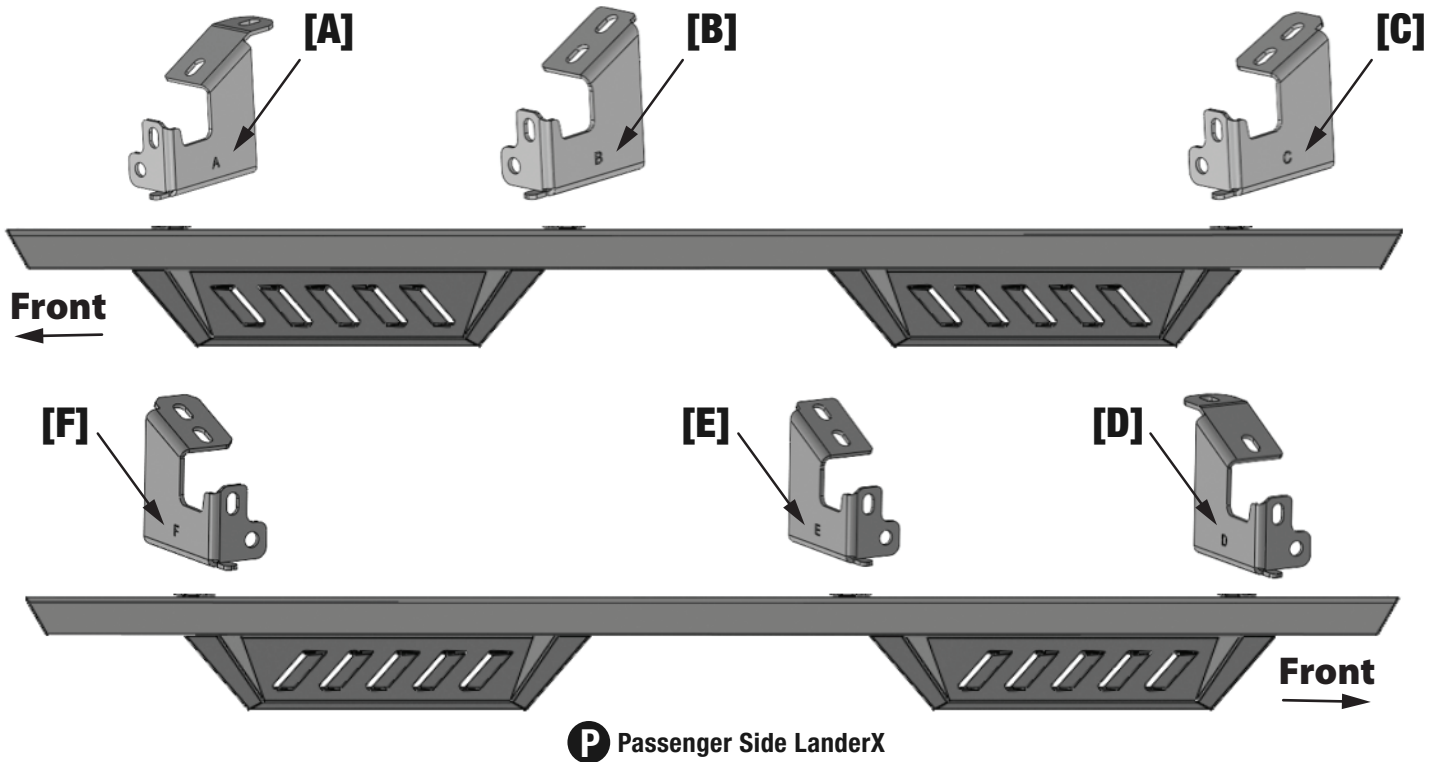


Bottom View


D Driver Side LanderX

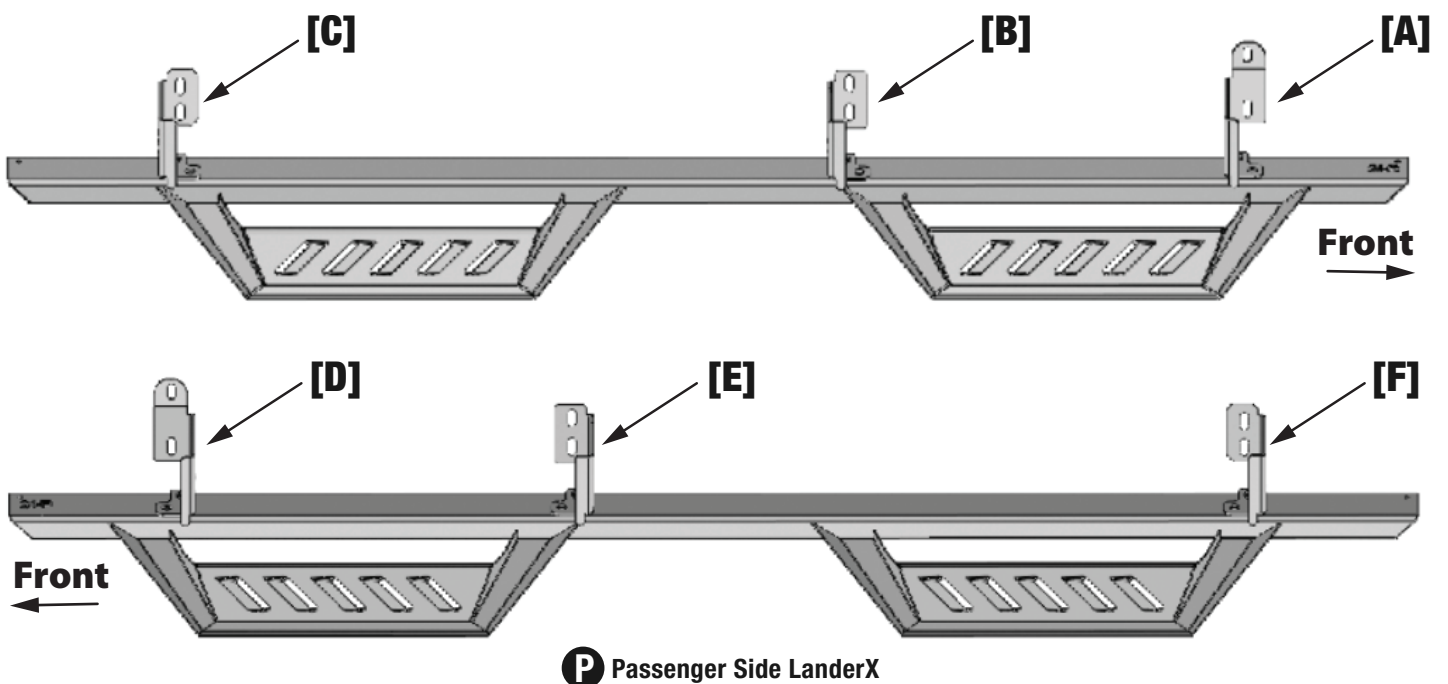


TOOLS REQUIRED

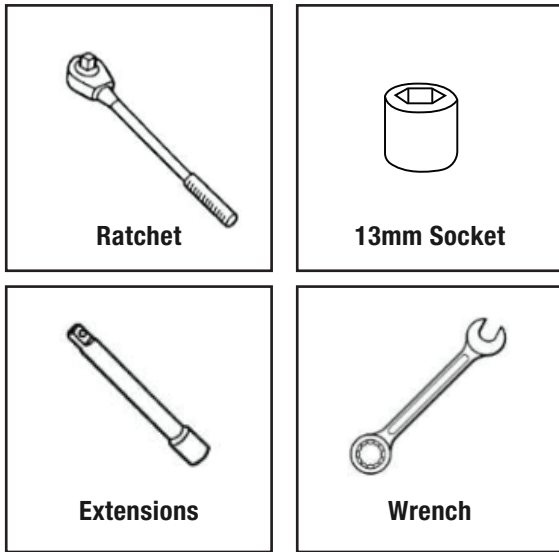

- (2) 8-1.25mm x 30mm Hex Bolts
- (2) 8mm x 24mm x 2mm Flat Washers
- (2) 8mm Lock Washers

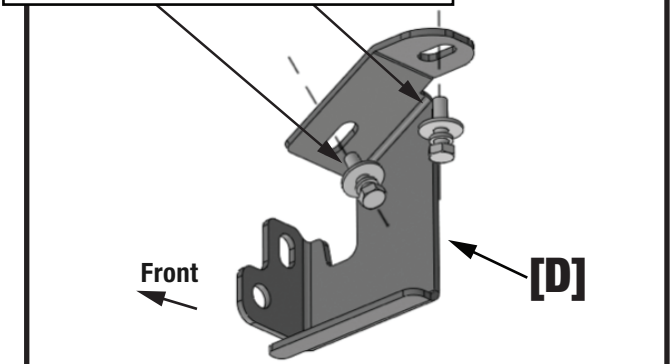


(Fig 2) Attach Passenger/Right Front Mounting Bracket [D] with indicated hardware. DO NOT fully tighten at this time

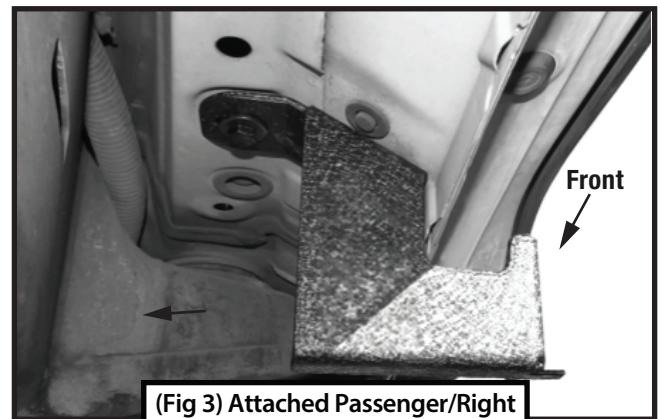


STEP 1 MOUNTING BRACKETS


Follow (Fig 1 – 9) to attach the brackets to the Passenger Side. **Only hand tighten hardware and brackets at this time.** Repeat the following steps on the Driver Side.




Passenger-side Front Mounting Area

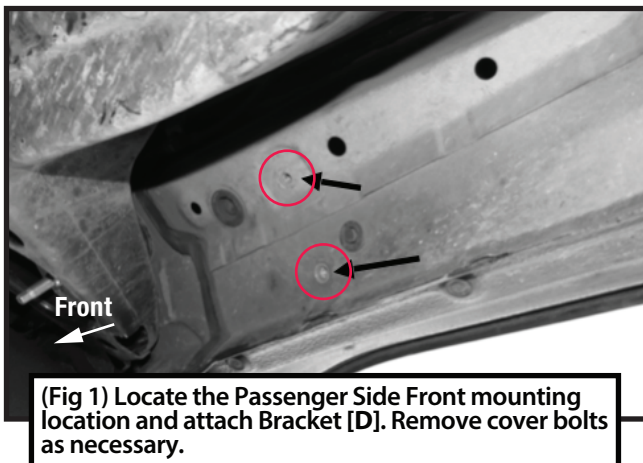


Passenger-side Center Mounting Area

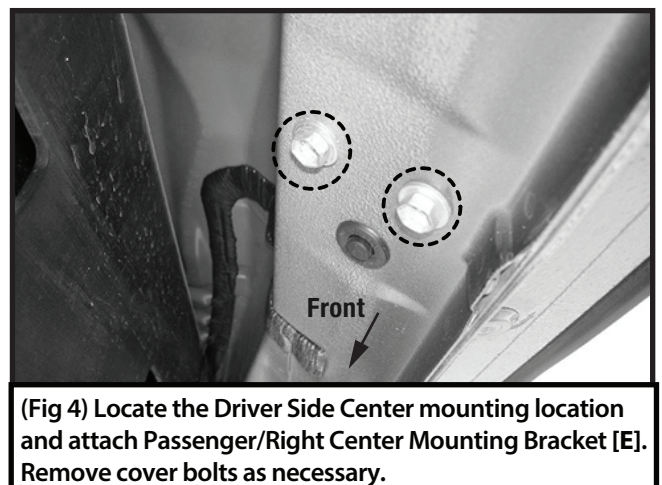

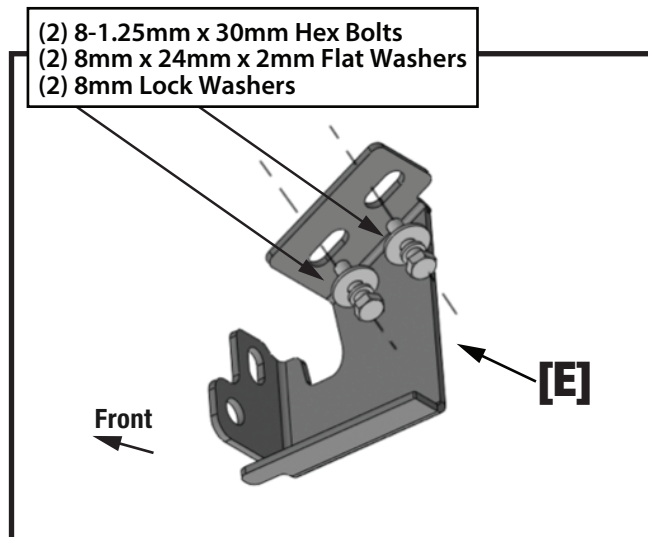


(Fig 5) Attach Passenger/Right Center Mounting Bracket [E] with indicated hardware. DO NOT fully tighten at this time.

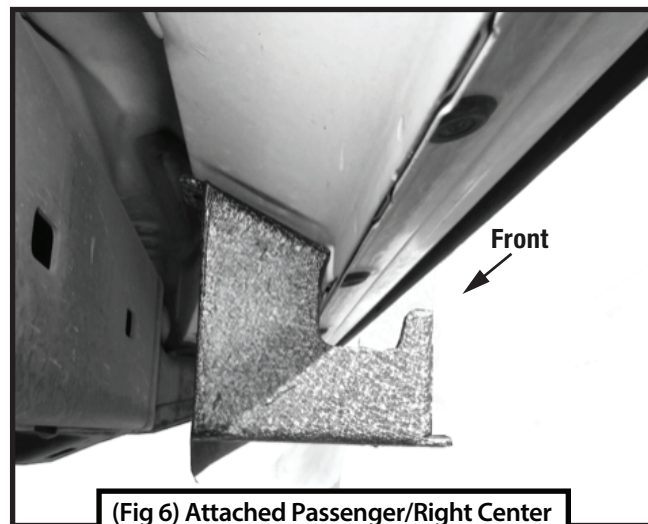


(Fig 6) Attached Passenger/Right Center Mounting Bracket [E] at center location.


Passenger-side Rear Mounting Area

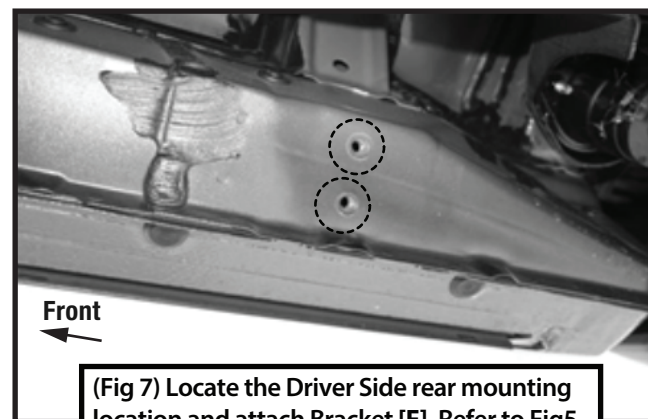

(Fig 7) Locate the Driver Side rear mounting location and attach Bracket [F]. Refer to Fig5 to attach Bracket [F] to rocker panel.

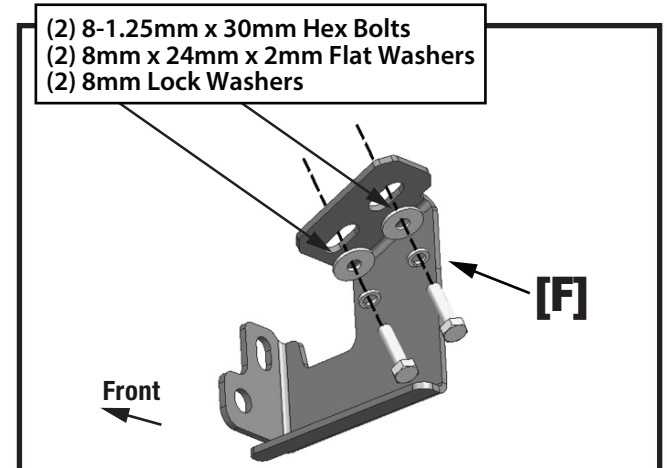


(Fig 8) Attach Passenger/Right Rear Mounting Bracket [F] with indicated hardware. DO NOT fully tighten at this time.

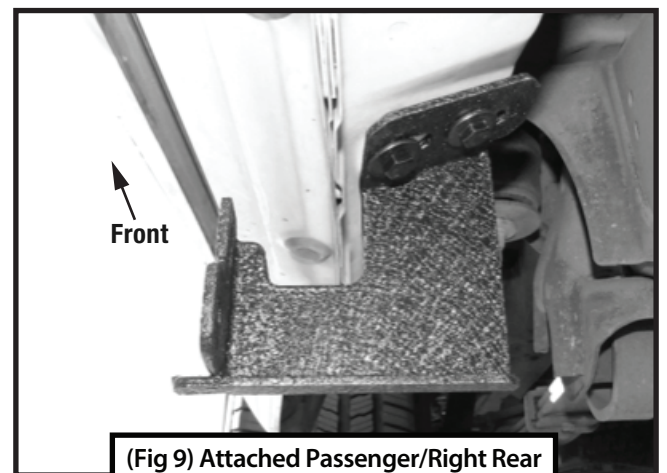

(Fig 9) Attached Passenger/Right Rear Mounting Bracket [F] at rear location

STEP 2 MOUNTING RUNNING BOARD

Follow (Fig 10) to install the Passenger Side Drop Step. After all brackets are attached to drop step, fully tighten all hardware to rocker panel and drop step.

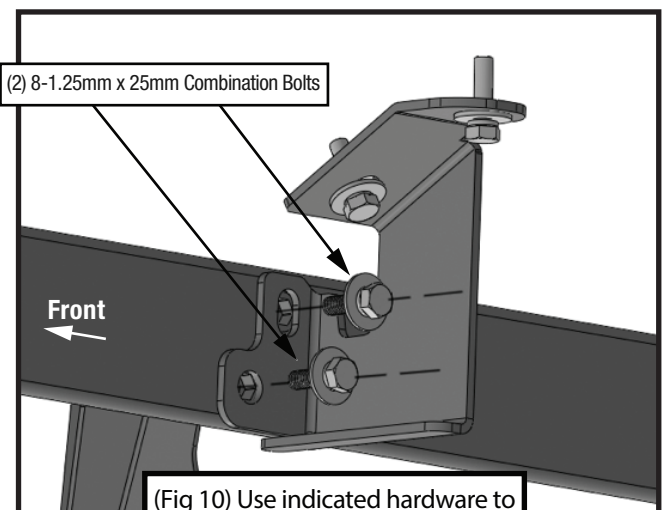

(Fig 10) Use indicated hardware to attach brackets to drop step


STEP 3 DRIVER SIDE

Repeat **STEPS 1-2** for driver side installation.

Front: Use Mounting Bracket **[A]** instead of **[D]**;

Center: Use Mounting Brackets **[B]** instead of **[E]**;

Rear: Use Mounting Brackets **[C]** instead of **[F]**.



STEP 4

Installation is complete. Do periodic inspections to the installation to **make sure that all hardware is secure and tight after preferred adjustments.**

