



# TYGER®

## TYGER RIDER®

TG-SS2T35218

### BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: [WWW.TYGERAUTO.COM/CONTACT](http://WWW.TYGERAUTO.COM/CONTACT)



### TORQUE VALUES


Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

### Parts List

- x1 Driver/Left Tyger Rider **(D)**
- x1 Passenger/Right Tyger Rider **(P)**
- x1 Driver/Left Front Mounting Bracket **(A)**
- x1 Passenger/Right Front Mounting Bracket **(D)**
- x1 Driver/Left Rear Mounting Bracket **(C)**
- x1 Passenger/Right Rear Mounting Bracket **(F)**
- x8 8-1.25mm x 30mm Hex Bolts
- x8 8-1.25mm x 25mm Combo Hex Bolts
- x8 8mm Lock Washers
- x8 8mm x 24mm OD x 2mm Flat Washers

Reference the letters printed on the brackets to determine mounting locations

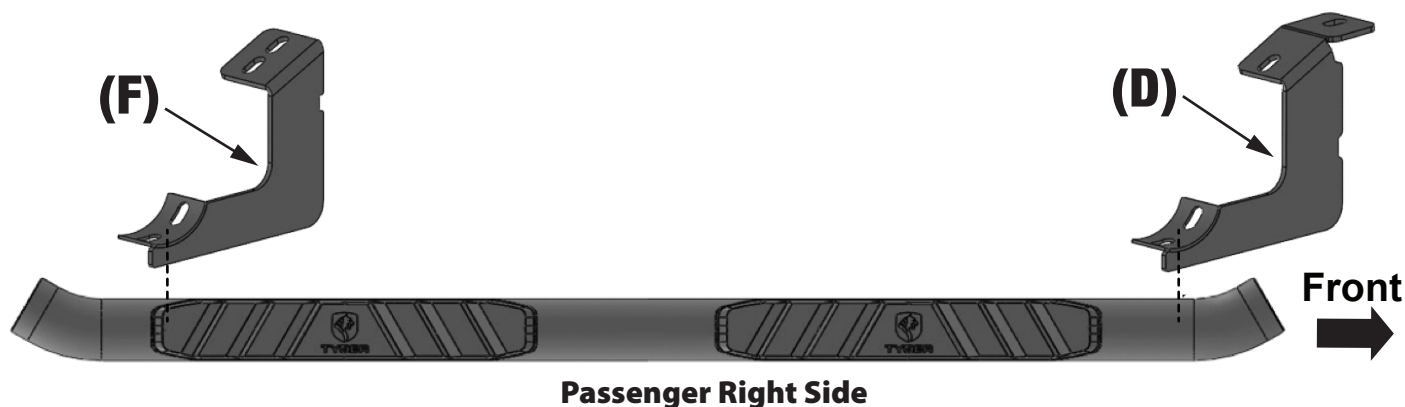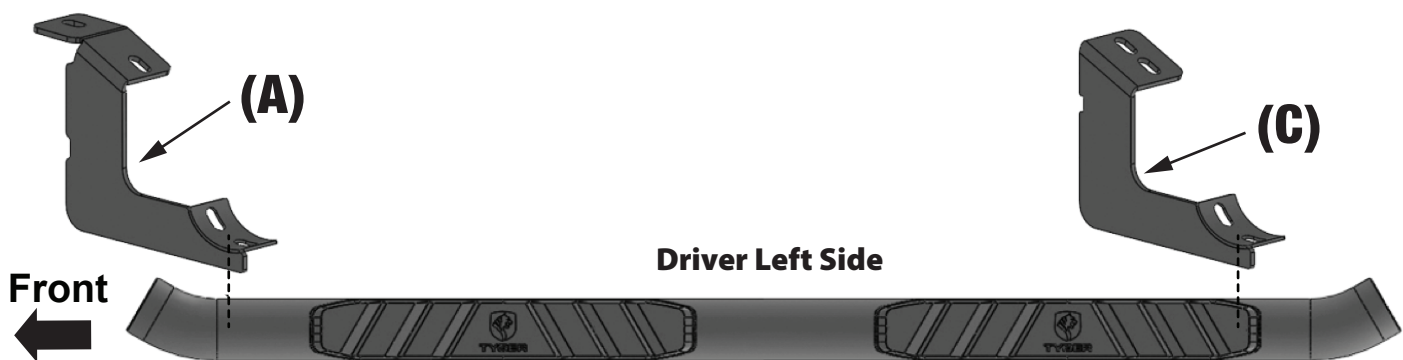

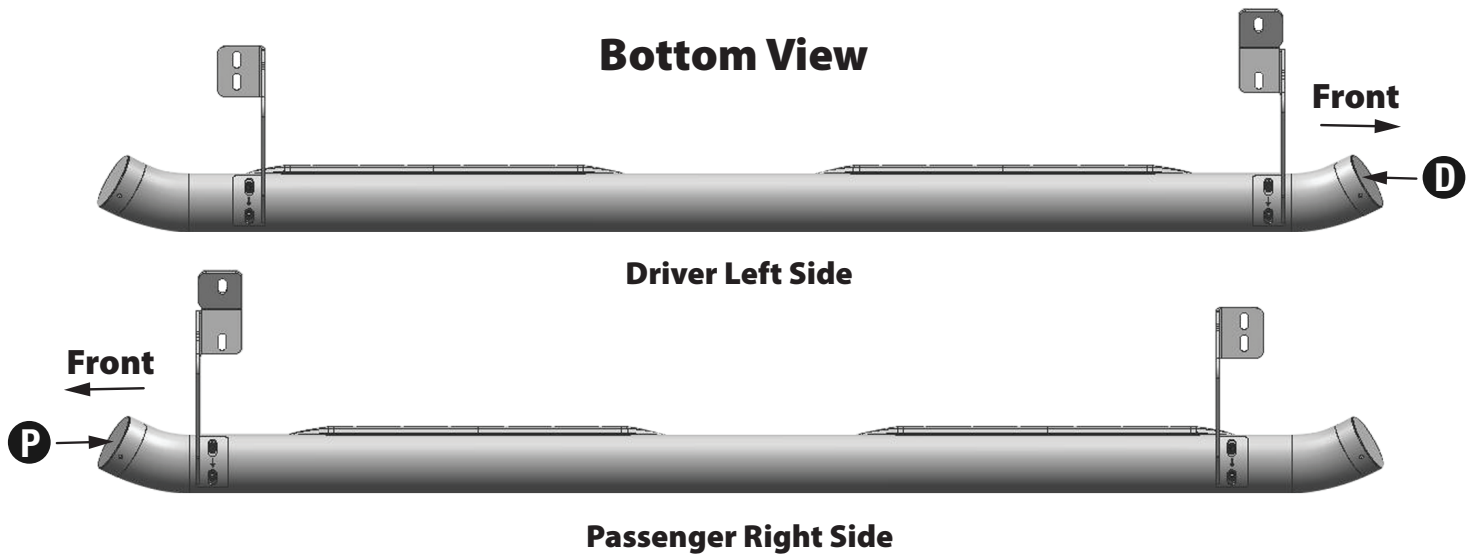

Distinguish the Driver and Passenger Side Steps by the **D** and **P** labeling on the end caps.



## STEP 1

REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY. ASSISTANCE IS HIGHLY RECOMMENDED.

## STEP 2

Starting on the Driver/Left side of the vehicle, remove any plastic plugs or hex bolts from the factory mounting locations along the bottom of the floor (Figs 1 & 2). The Sidebar will mount to the front and rear locations.


Driver/Left Side Installation Pictured

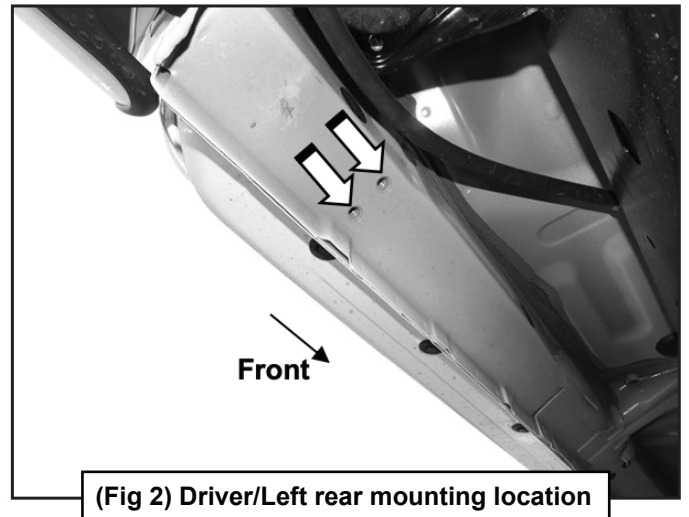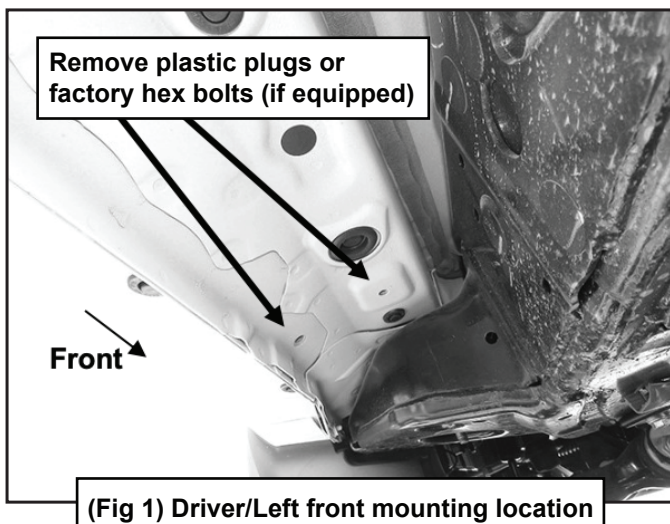


## STEP 3

Select the Driver/Left Front Mounting Bracket **(A)**. Attach the bracket to the front location with (2) 8mm Hex Bolts, (2) 8mm Lock Washers and (2) 8mm Flat Washers (Figs 3 & 4). DO NOT tighten hardware at this time.

Driver/Left Side Installation Pictured

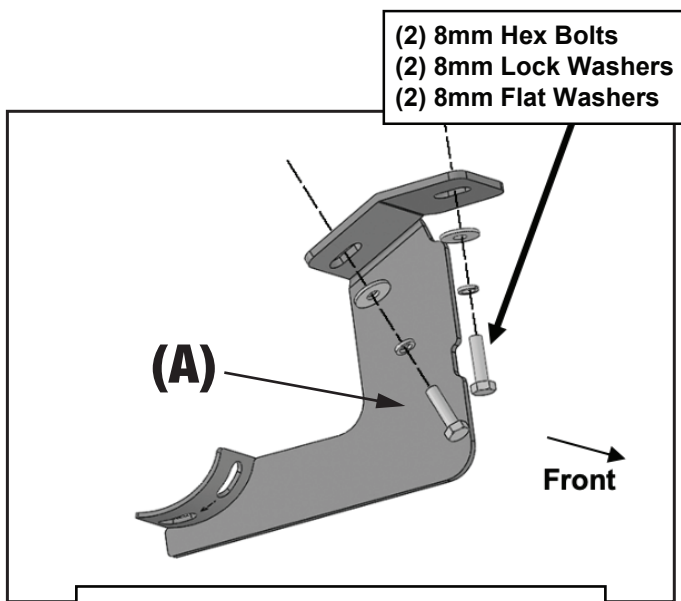


**(Fig 3) Attach the Driver/Left Front Mounting Bracket (A) to the front location**

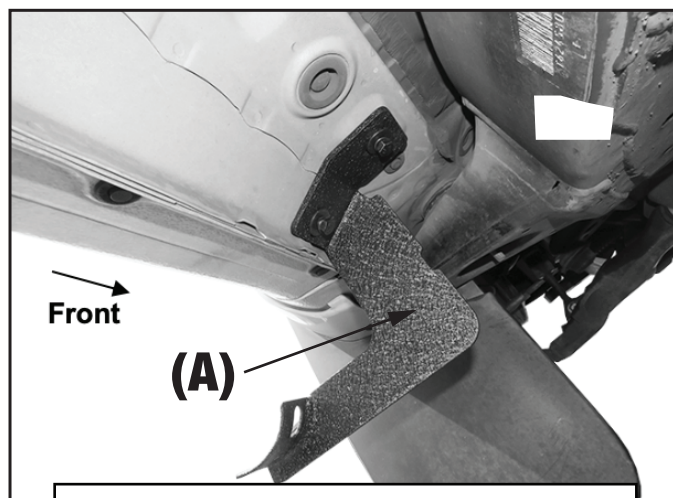


**(Fig 4) Driver/Left Front Mounting Bracket (A) attached to the front location**

#### Driver/Left Side Installation Pictured

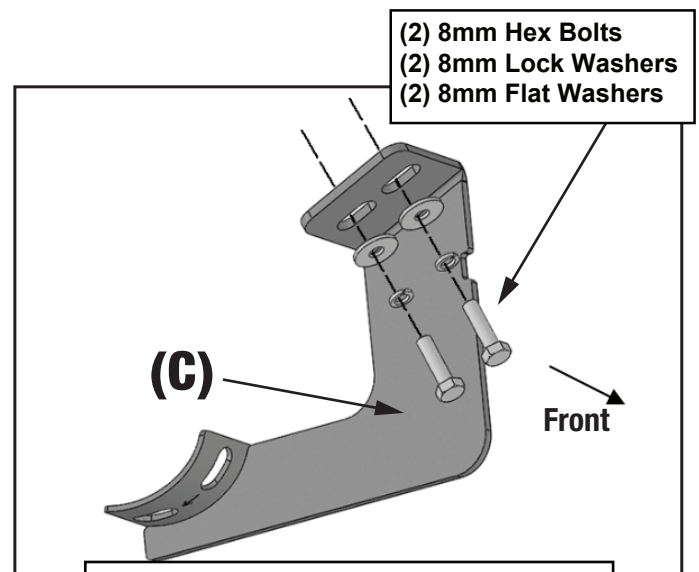

**(Fig 5) Attach the Driver/Left Rear Mounting Bracket (C) to the front location**

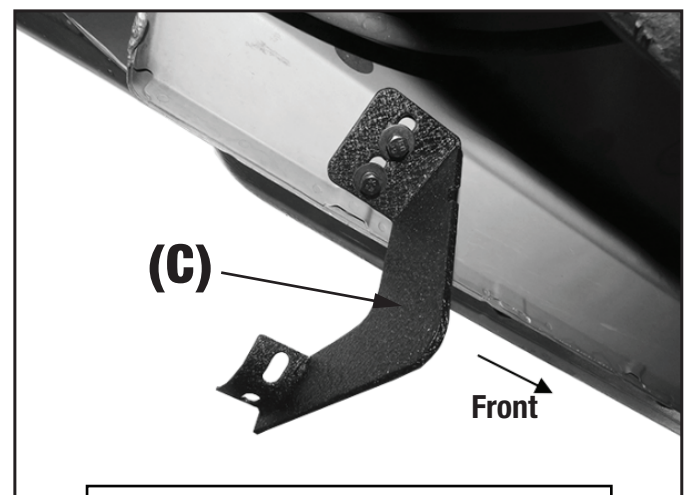

**(Fig 6) Driver/Left Rear Mounting Bracket (C) attached to the front location**

## STEP 4



Move to the rear location. Select the Driver/Left Rear Mounting Bracket **(C)**. Repeat **STEP 3** to attach the Bracket to the rear location (Figs 5 & 6).

## STEP 5

Select the Driver/Left Tyger Rider. Carefully place Sidebar on the brackets.

**IMPORTANT:** DO NOT slide or rotate Sidebar on cradles, or damage to the finish may result. Attach Sidebar to the Mounting Brackets with (4) 8mm Combo Bolts (Figs 7 & 8). DO NOT tighten hardware.

**(Fig 7) Attach the Driver/Left Sidebar to the Mounting Brackets**

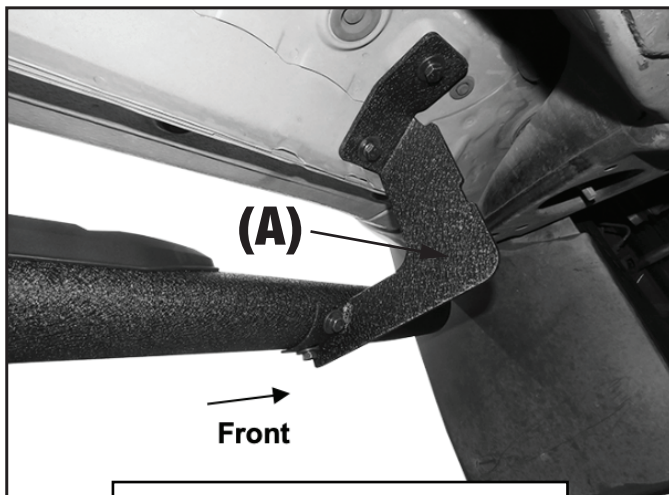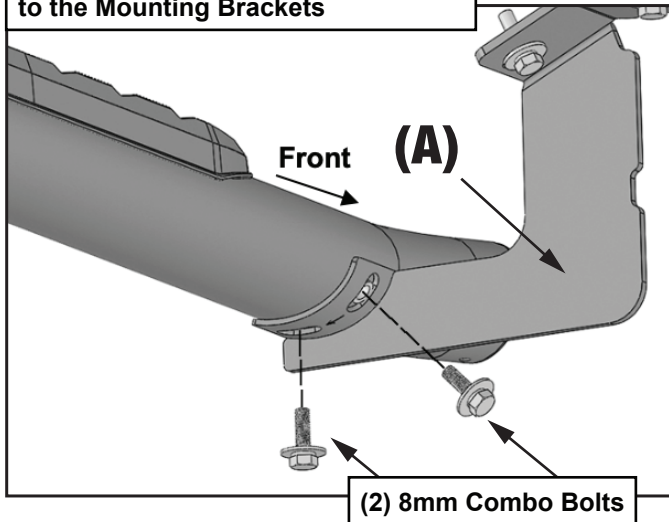

**(Fig 8) Driver/Left Sidebar attached to the front Mounting Bracket (A)**

## STEP 6

Level and adjust the Sidebar and tighten all hardware.

## STEP 7

Repeat **STEPS 2-6** to attach the Passenger/Right Tyger Rider.

## STEP 8

Do periodic inspections to the installation to make sure that all hardware is secure and tight.