



TYGER®

TYGER RIDER®

TG-SS2T35848

BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES


Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

- x1** Driver/Left Tyger Rider
- x1** Passenger/Right Tyger Rider
- x1** Driver/Left Front Mounting Bracket
- x1** Passenger/Right Front Mounting Bracket
- x3** Driver/Left Center and Rear Mounting Brackets
- x3** Passenger/Right Center and Rear Mounting Brackets
- x16** 8mm x 30mm Hex Bolts
- x16** 8mm Lock Washers
- x16** 8mm x 24mm OD x 2mm Flat Washers
- x16** 8mm x 25mm Combo Bolts

Parts List

Driver/Left Side Front Mounting Bracket

Driver/Left Side Center and Rear Mounting Brackets

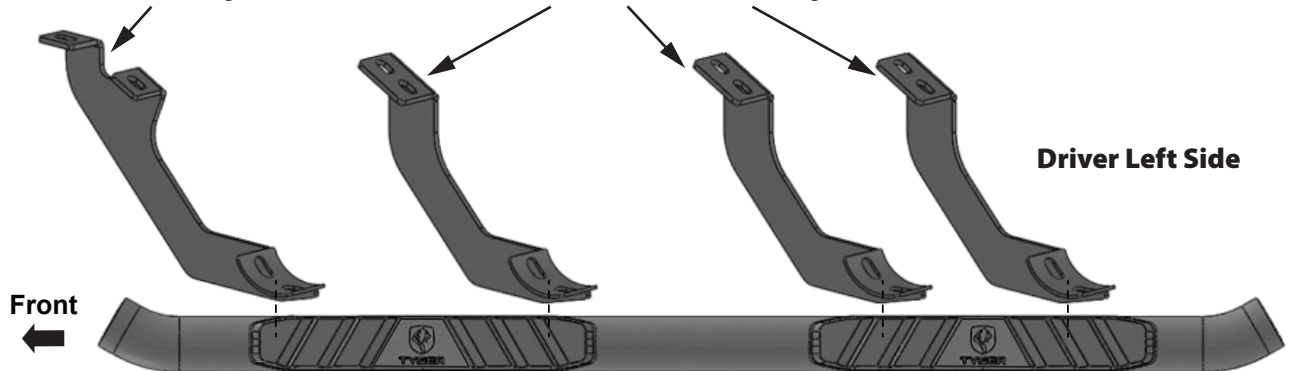



Driver Left Side

Passenger/Right Side Center and Rear Mounting Brackets

Passenger/Right Side Front Mounting Bracket

Passenger Right Side

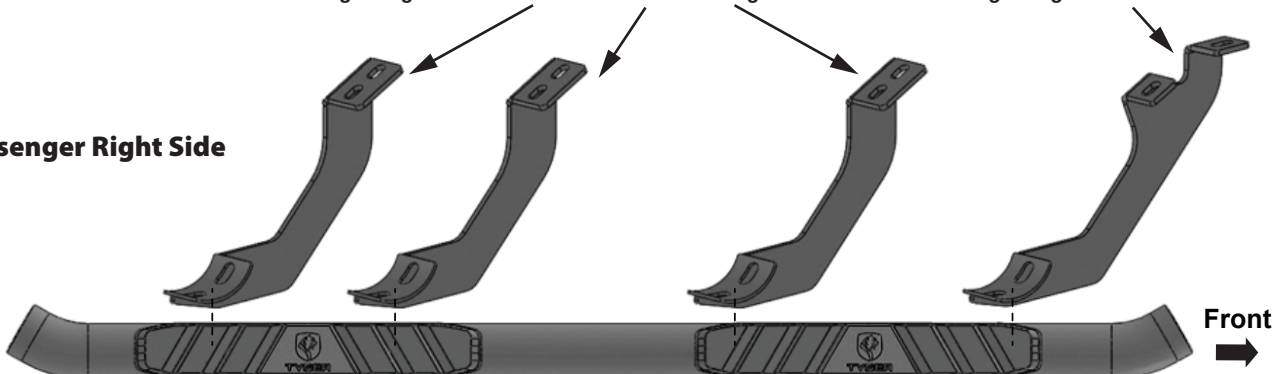

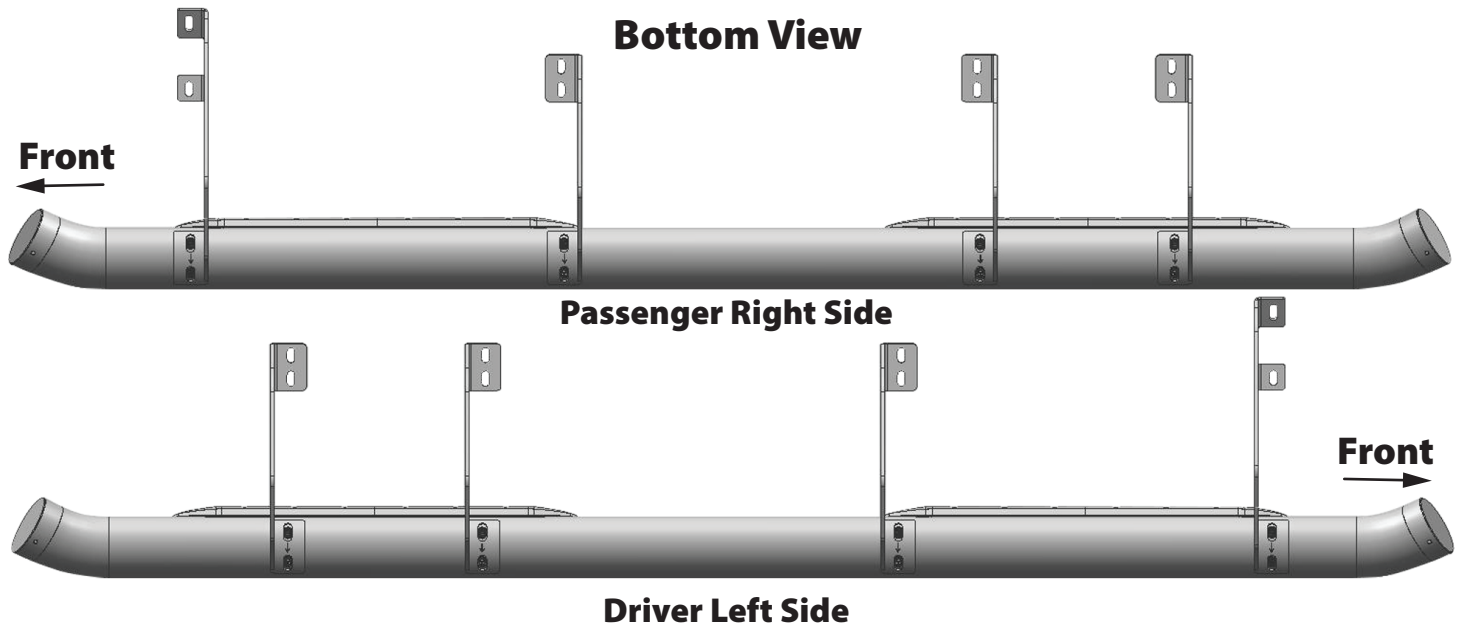

PROCEDURE:

REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY. USE ILLUSTRATION TO IDENTIFY BRACKETS AND RUNNING BOARDS.

STEP 1


Starting on the Driver/Left front of the vehicle, remove the plastic plugs or hex bolts covering the (2) threaded holes in the floor panel (Fig 1).

Driver/Left Side Installation Pictured

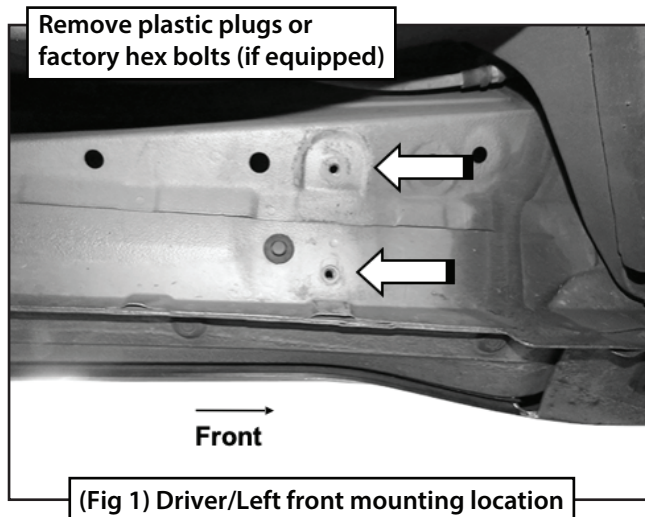

STEP 2


Select (1) Driver/Left Front Mounting Bracket. Attach the Bracket to the mounting location with (2) 8mm Hex Bolts, (2) 8mm Lock Washers and (2) 8mm Flat Washers (Fig 2). **IMPORTANT:** DO NOT slide the Tyger Rider, (forward or backward or rotate), on the Brackets or damage to the finish on the Tyger Rider may result. DO NOT tighten hardware

Driver/Left Side Installation Pictured

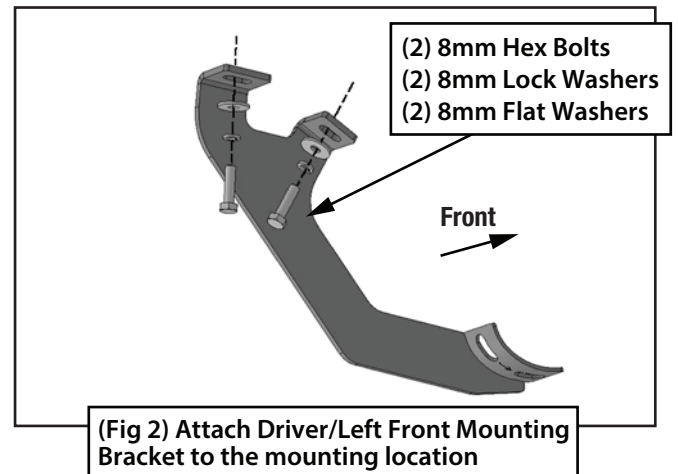
STEP 3

Select (1) Driver/Left Center and Rear Mounting Bracket. Repeat **STEP 2** to attach the Bracket to the **2nd** mounting location shown below (Fig 3-4).

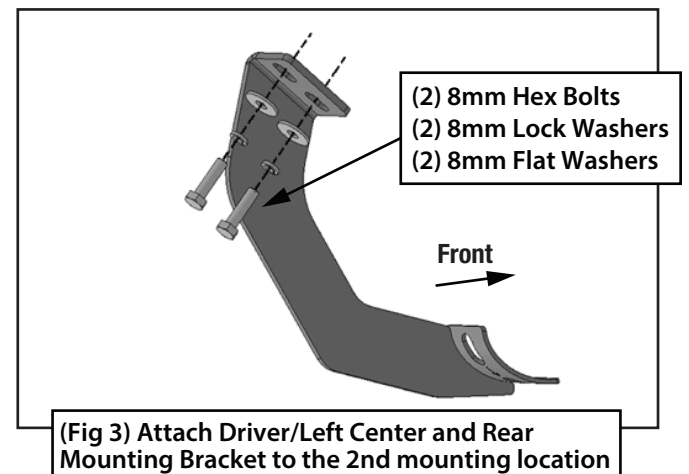

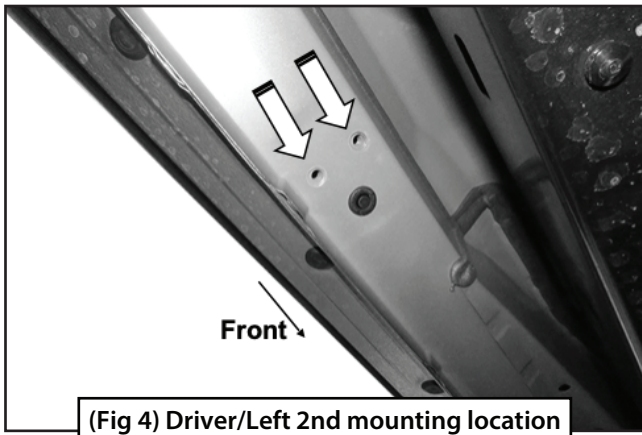


(Fig 4) Driver/Left 2nd mounting location

STEP 4


Continue to the **3rd** and rear mounting locations (Fig 5 & 6). Repeat **STEP 3** to attach (1) Driver/Left Center and Rear Mounting Bracket each to the **3rd** and **4th**/rear mounting locations (Fig 5 & 6).

Remove plastic plugs or factory hex bolts (if equipped)

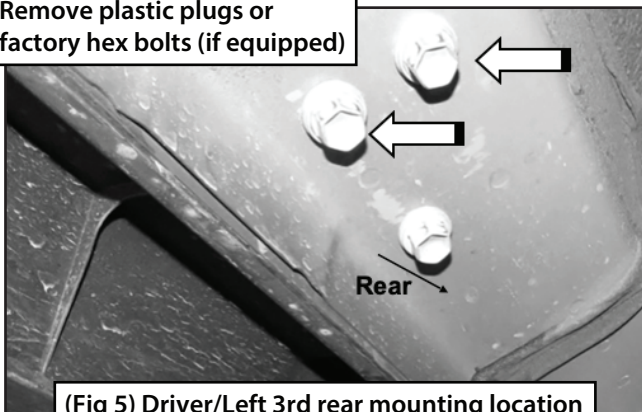

(Fig 5) Driver/Left 3rd rear mounting location

Remove plastic plugs or factory hex bolts (if equipped)

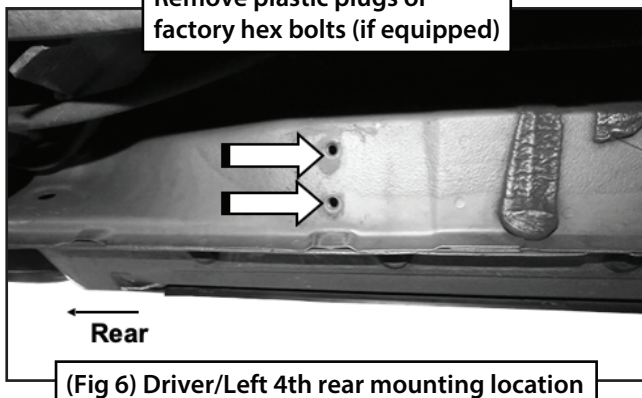


(Fig 6) Driver/Left 4th rear mounting location

STEP 5

Select the Driver/Left Tyger Rider. Attach the Tyger Rider to the Mounting Brackets with (8) 8mm Combo Bolts (Fig 7). **DO NOT** tighten hardware

Driver/Left Side Installation Pictured

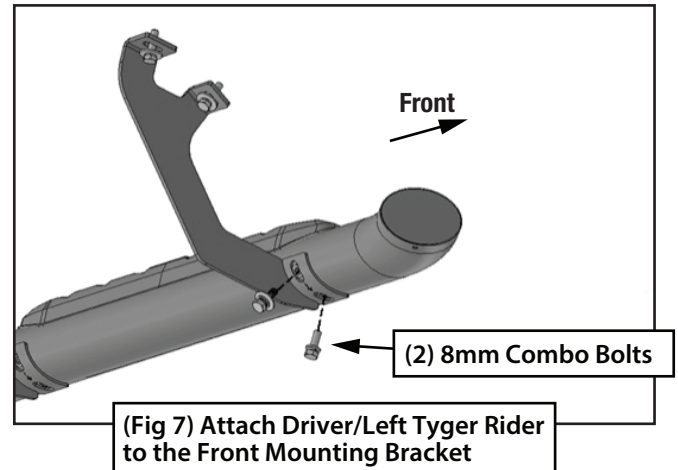

(Fig 7) Attach Driver/Left Tyger Rider to the Front Mounting Bracket

STEP 6

Level and adjust the Tyger Rider and tighten all hardware.

STEP 7

Repeat **STEPS 1-6** to attach the Passenger/Right Side Tyger Rider.

STEP 8

Do periodic inspections to the installation to make sure that all hardware is secure and tight.