



TYGER®

TYGER RIDER®

TG-SS2T36828

Scan to Download the
Latest Digital Version



BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES

Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

x1 Driver/Left TYGER Rider

x1 Passenger/Right TYGER Rider

x1 Driver/Left Front Mounting Bracket **[A]**

x1 Passenger/Right Front Mounting Bracket **[C]**

x2 Driver/Left Center & Rear Mounting Brackets **[B]**

x2 Passenger/Right Center & Rear Mounting Brackets **[D]**

x12 8-1.25mm x 30mm Hex Bolts

x12 8-1.25mm x 25mm Combo Bolts


x12 8mm x 24mm OD x 2mm Flat Washers

x12 8mm Lock Washer

Parts List



Top View

ATTENTION: Refer to **[D]** and **[P]** labelling on the side of the tubes to determine Driver and Passenger Rider



Front
←

[P] Passenger Side TYGER Rider



Front
←

[D] Driver Side TYGER Rider



x2

[D]

Passenger/Right
Center & Rear Mounting Brackets



x1

[C]

Passenger/Right
Front Mounting Bracket



x1

[A]

Driver/Left
Front Mounting Bracket



x2

[B]

Driver/Left
Center & Rear Mounting Brackets



Hex Bolts

x12 8 – 1.25mm x 30mm Hex Bolts



Combo Bolts

x12 8 – 1.25mm x 25mm Combo Bolts



Lock Washers

x12 8mm Lock Washers




Flat Washers


x12 8mm x 24mm OD x 2mm Flat Washers

Reference the letters printed on the brackets to determine mounting locations



Top View

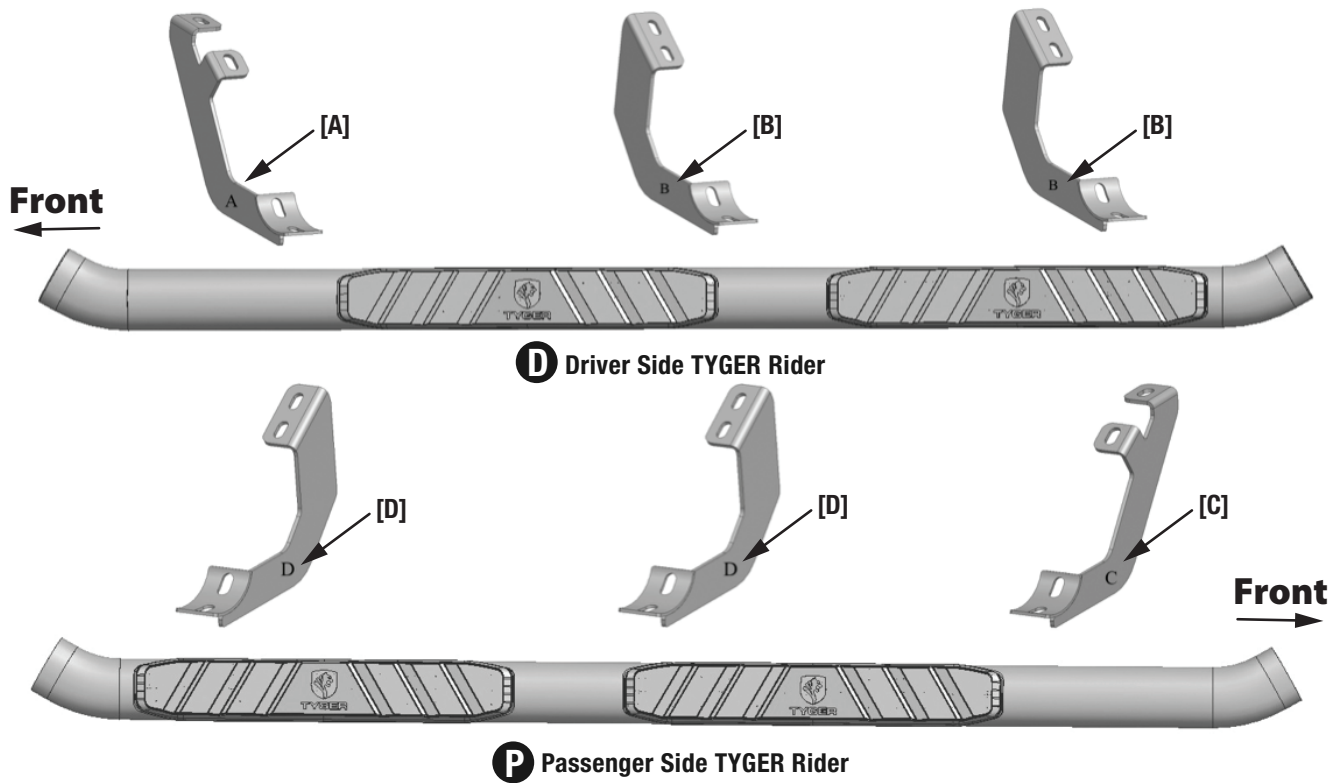


Bottom View

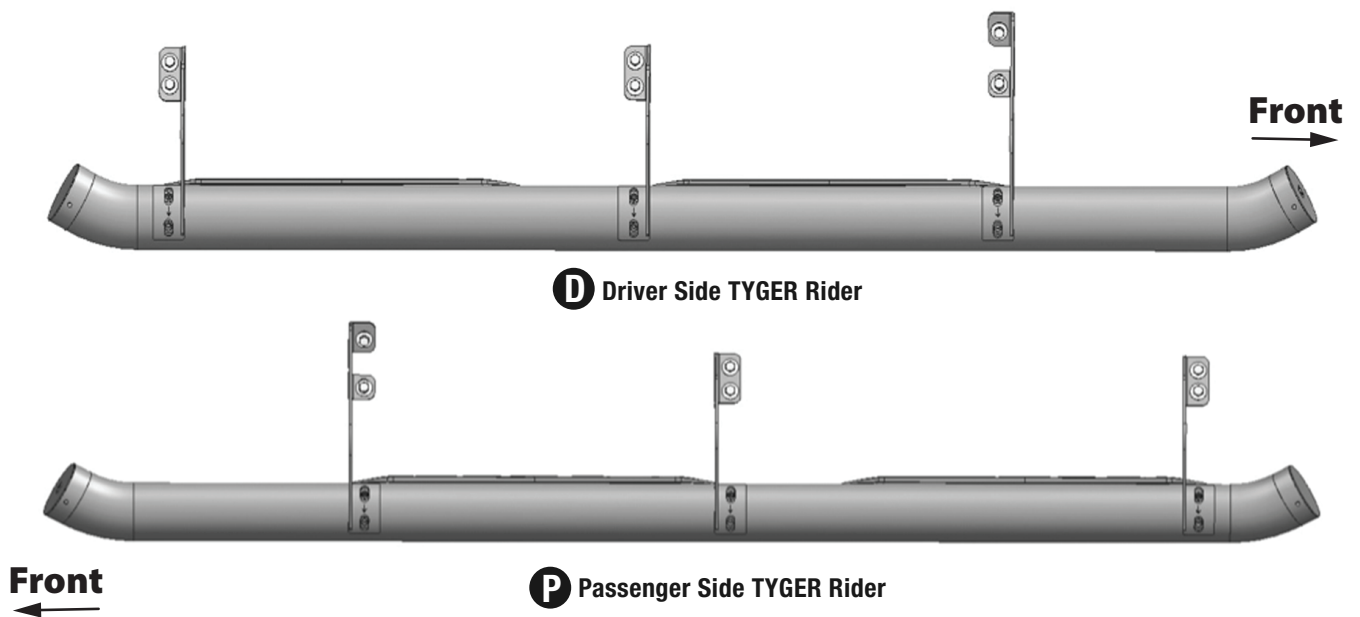


TOOLS REQUIRED

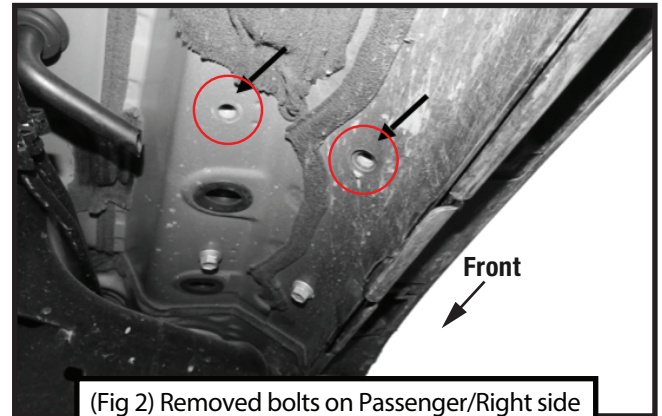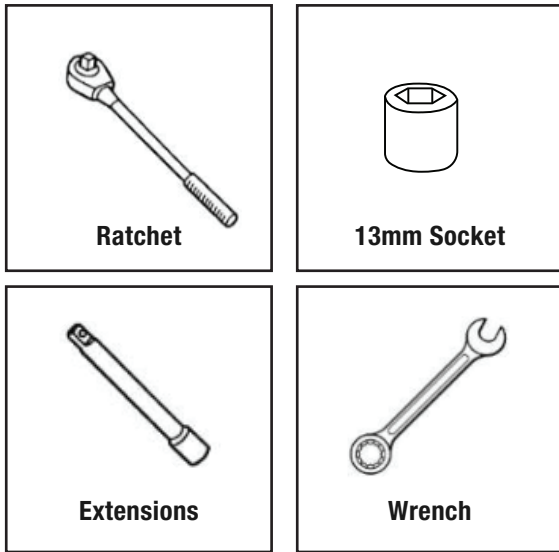

(Fig 2) Removed bolts on Passenger/Right side front mounting location and attach bracket [C]

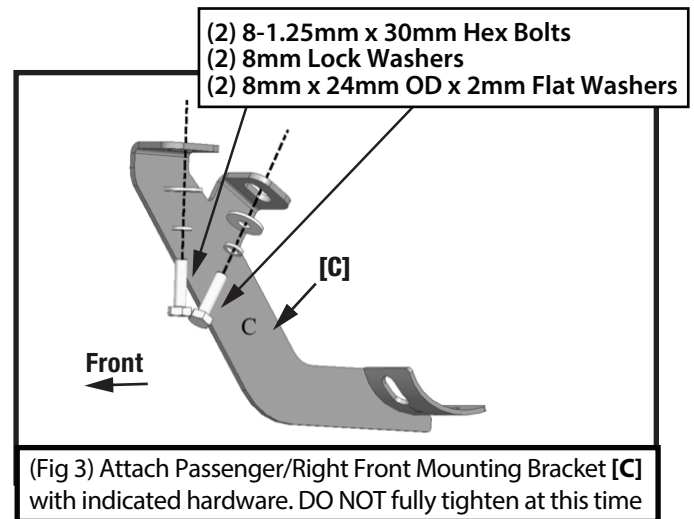

(Fig 3) Attach Passenger/Right Front Mounting Bracket [C] with indicated hardware. DO NOT fully tighten at this time

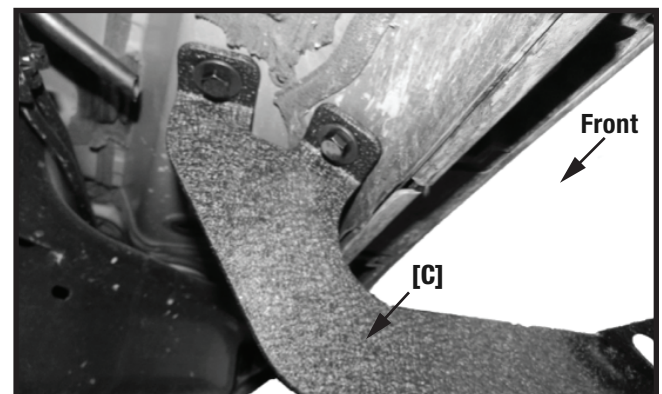


(Fig 4) Attached Passenger/Right Front Mounting Bracket [C]


Passenger-side Center Mounting Area

STEP 1 MOUNTING BRACKETS


Follow (Fig 1 – 12) to attach the brackets to the Passenger/Right Side. Ensure all hardware is hand tightened at this point.




Passenger-side Front Mounting Area

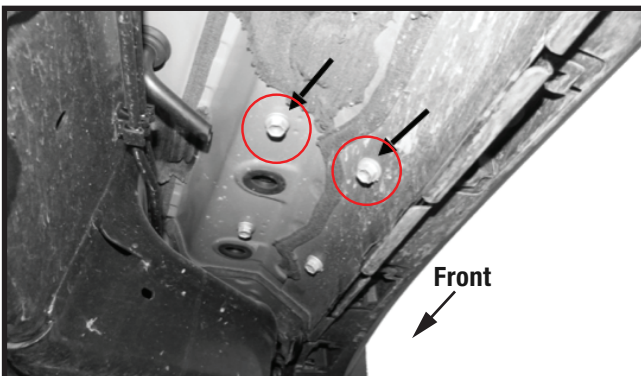


(Fig 1) Locate the Passenger Side Front mounting location. Remove any plastic tabs or bolts as necessary

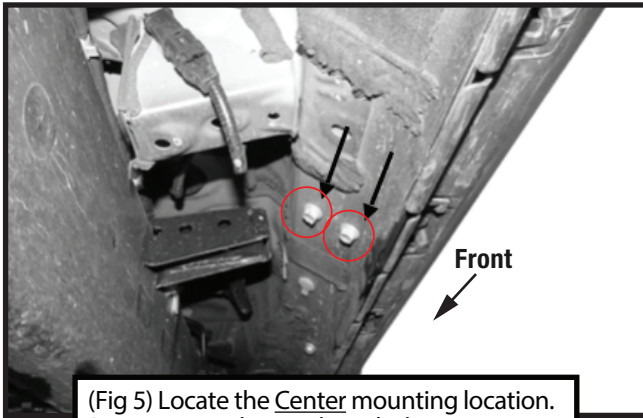


(Fig 5) Locate the Center mounting location. Remove any plastic tabs or bolts as necessary

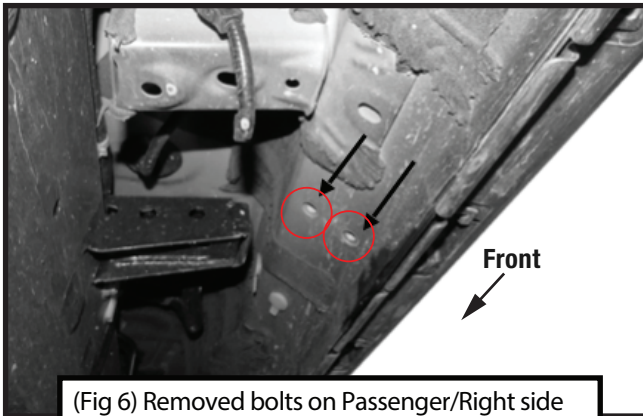

(Fig 6) Removed bolts on Passenger/Right side center mounting location and attach bracket [D]

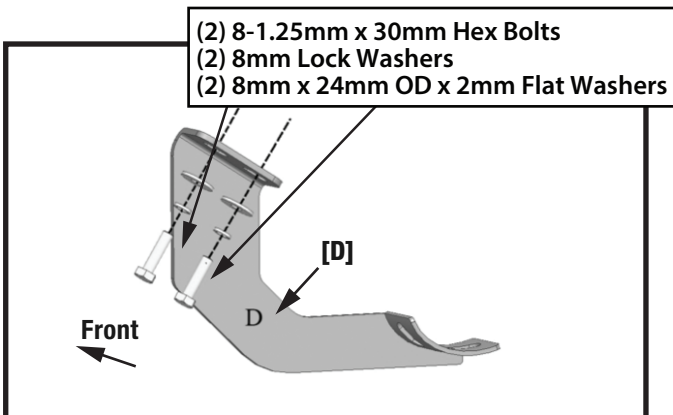


(Fig 7) Attach Passenger/Right Center Mounting Bracket [D] with indicated hardware. DO NOT fully tighten at this time

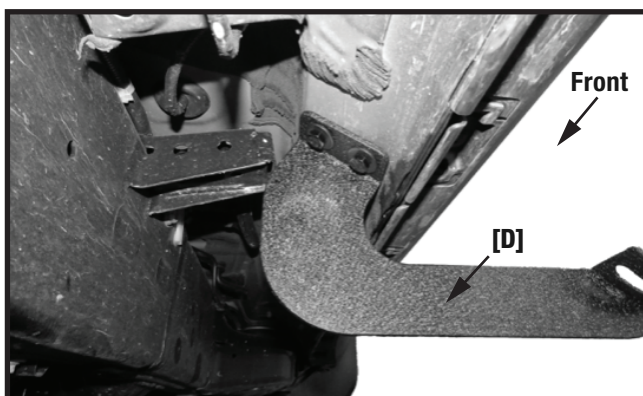


(Fig 8) Attached Passenger/Right Center Mounting Bracket [D]




Passenger-side Rear Mounting Area

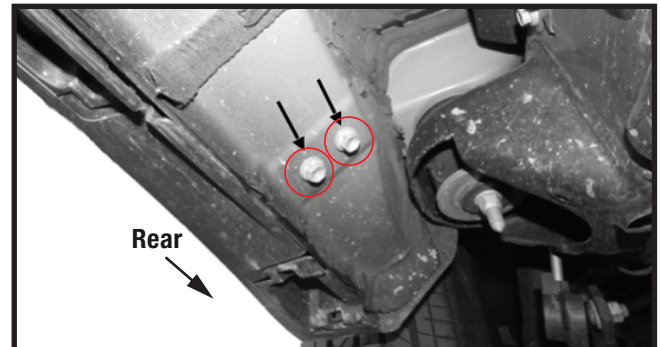


(Fig 9) Locate the Passenger Side Rear mounting location. Remove any plastic tabs or bolts as necessary

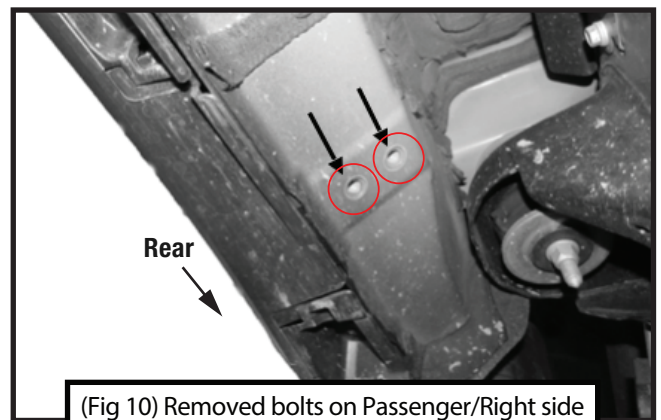

(Fig 10) Removed bolts on Passenger/Right side rear mounting location and attach bracket [D]

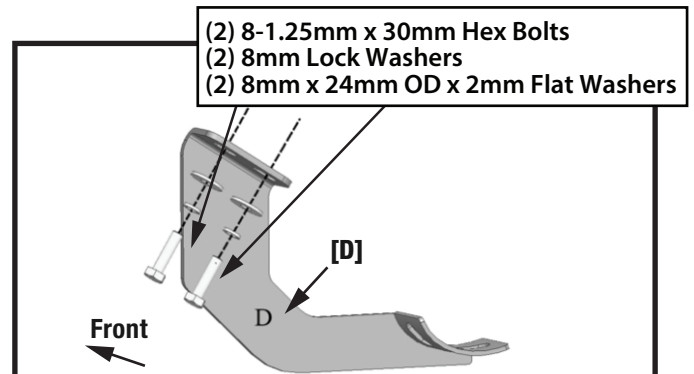


(Fig 11) Attach Passenger/Right Rear Mounting Bracket [D] with indicated hardware. DO NOT fully tighten at this time

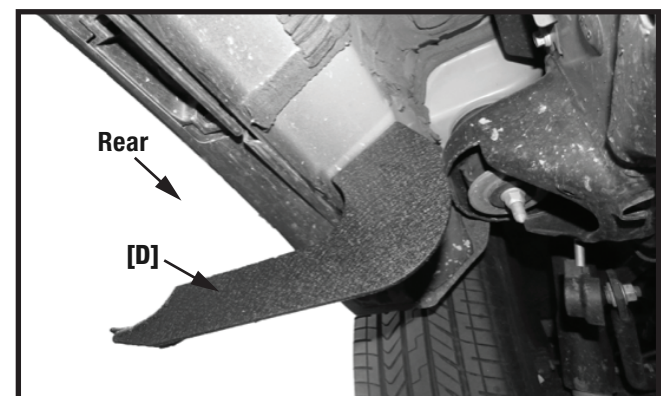

(Fig 12) Attached Passenger/Right Rear Mounting Bracket [D]

STEP 2 MOUNTING RUNNING BOARD

Follow (Fig 13) to install the TYGER Rider on the Passenger/Right. Ensure all hardware is fully tightened at this point.

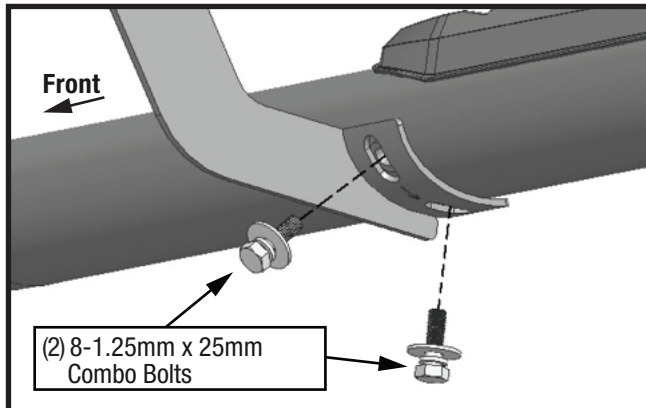


(Fig 13) Use indicated hardware to attach brackets to side bar

STEP 3 DRIVER SIDE

Repeat **STEPS 1-2** for driver side installation.

Use Front Mounting Brackets **[A]** instead of **[C]**;

Use Center and Rear Mounting Brackets **[B]** instead of **[D]**.



STEP 4

Installation is complete. Do periodic inspections to the installation to make sure that all hardware is secure and tight.



Complete Installation